

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
7 October 2004 (07.10.2004)

PCT

(10) International Publication Number
WO 2004/086796 A1

(51) International Patent Classification⁷: H04Q 7/38

(21) International Application Number:
PCT/EP2004/004017

(22) International Filing Date: 25 March 2004 (25.03.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
03290795.8 28 March 2003 (28.03.2003) EP

(71) Applicant (for all designated States except US): NORTEL
NETWORKS LIMITED [CA/CA]; 2351 Boulevard Al-
fred Nobel, St. Laurent, Québec H4S 2A9 (CA).

(72) Inventors; and

(75) Inventors/Applicants (for US only): WATSON, Mark
[GB/GB]; 6 Ellingham Road, London W12 9PR (GB).
FAUCONNIER, Denis [FR/FR]; 13, avenue de Coubertin,
F-78470 Saint-Rémy-les-Chevreuses (FR). LAUTIER,
Laurence [FR/FR]; 69, rue Alfred Champy, F-78370
Plaisir (FR).

(74) Agents: LOISEL, Bertrand et al.; Cabinet Plasseraud,
65/67, rue de la Victorie, F-75440 Paris Cedex 09 (FR).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), Euro-
pean (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,
GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:


— of inventorship (Rule 4.17(iv)) for US only

Published:

— with international search report
— before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: INCLUDING A HASHED SERVICE IDENTIFIER IN A PAGING MESSAGE FOR A SERVICE GROUP CALL

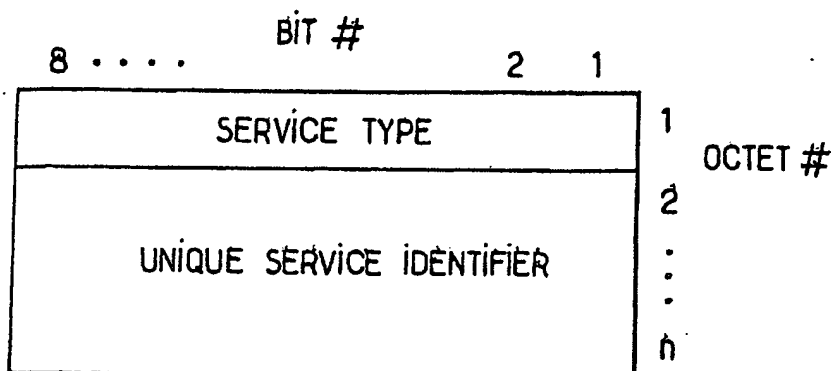

(57) Abstract: A service provided to wireless stations (1) through a telecommunication network (2) is identified by a unique service identifier stored in the telecommunication network and in at least one subscriber station among the wireless stations. The method comprises the steps of: determining a paging identifier in the telecommunication network and at said subscriber station, by applying a hash function to a data string including at least part of the unique service identifier; associating said subscriber station with the determined paging identifier; and prior to transmitting information pertaining to the service over a broadcast channel, transmitting a paging message incorporating said paging identifier to the wireless stations.

WO 2004/086796 A1

INCLUDING A HASHED SERVICE IDENTIFIER IN A PAGING MESSAGE FOR A SERVICE GROUP CALL

The present invention relates to the provision of services to wireless subscriber stations through a communication network.

5 It is known to provide services in systems where wireless stations are constantly or periodically listening to the communication channels over which the service is delivered. Such operating mode results in a significant power consumption for the wireless stations, particularly detrimental to their autonomy if the actual transmission over the channels is sparse.

10 For some new services, it is planned to make an announcement of the start of a relevant transmission in order to inform the wireless stations of when the communication channels must be listened to. The announcement may be performed by paging a group of wireless stations. Such paging is a quite conventional mode of reaching idle stations, i.e. stations that have no active
15 communication in progress with the network. It is detailed for instance, in the context of UMTS ("Universal Mobile Telecommunication System"), in section 8.1.2 of the technical specification TS 25.331, version 4.1.0, Release 4, "RRC Protocol Specification", published in June 2001 by the 3GPP ("3rd Generation Partnership Project").

20 However, if no indication of the service is incorporated in the paging message, all the paged wireless stations read the specified channels, while only very few of them may actually have a subscription with the service.

Moreover, it is not readily feasible to include in the paging message a unique identifier of the service. Such identifier can be a long binary code not
25 suitable for transmission over a paging channel because the amount of information broadcast on a paging channel has to be minimized to limit the radio interference and to reduce the processing accomplished by the idle stations and hence their power consumption.

An object of the present invention is to overcome the above limitation by
30 optimizing the delivery of broadcast or multicast types of services.

- 2 -

The invention proposes a method of providing a service to wireless stations through a telecommunication network as set out in claim 1.

Other aspects of the invention relate to telecommunication network equipment and to wireless stations as set out in claims 5 and 8 respectively.

5 The invention provides a paging announcement of a starting transmission pertaining to a service identified by means of a hash of a data string including a unique identifier of the service. Such hash has a reduced size compared to the initial data string. Its uniqueness is not guaranteed, but the use of a hash algorithm to generate it minimizes the risk of collision.

10 Anyway, the unique service identifier is usually transmitted over the broadcast channel or channels bearing the service, so that the wireless stations paged by means of the hashed identifier can check the unique service identifier afterwards, and stop receiving the information if it does not match the stored service identifier. Thus, even if collisions occur (with a probability which can be kept low if
15 the hash code length is sufficient), their only consequence is to make some wireless stations momentarily listen to the channel bearing a service to which they have no subscription. Since the consequences of a collision are not very harmful, it is not necessary to provide a very long paging identifier for the sole purpose of avoiding collisions.

20 Other features and advantages of the present invention will become apparent in the following description of non-limiting exemplary embodiments, with reference to the appended drawings, in which:

- figure 1 is a block diagram of a system suitable for implementing the invention; and
- 25 - figure 2 is a diagram illustrating an example of data string structure usable in an embodiment of the invention.

Mobile wireless stations 1 communicate with a cellular telecommunication network 2, comprising a radio access network 3 and a core network 4 capable of transmitting data. Although the invention can take place in any system having such
30 entities, it will be described hereinafter in a particular embodiment of a UMTS system, without restricting the scope of the disclosure.

- 3 -

In this context, the wireless stations 1 are called UE ("User Equipment"), the radio access network 3 of the UMTS network is called UTRAN ("Universal Terrestrial Radio Access Network") and the core network 4 comprises interconnected switches called SGSN 5 ("Serving GPRS Support Nodes", connected to the UTRAN), and GGSN ("Gateway GPRS Support Node"). The GGSN 6 is a gateway for interfacing the UMTS network with external data networks, e.g. an IP ("Internet Protocol") network 11.

Servers 8-10 are arranged for providing broadcast services to UEs 1 having corresponding subscriptions. The services rendered can be of various types. In the following, we will more particularly consider services of the family referred to as MBMS ("Multimedia Broadcast/Multicast Service"), which is currently developed and standardized by the 3GPP. A description of its architecture and functionalities can be found in the technical specification TS 23.246, v.0.4.0, "MBMS ; Architecture and Functional Description (Release 6)", published in February 2003 by the 3GPP. MBMS enables a subscriber UE to receive data through a UMTS network in particular after having been informed of the start of a broadcast/multicast transmission.

MBMS uses a specific core network unit called BM-SC 7 ("Broadcast/Multicast Service Centre"), which is responsible for service provisioning and delivery. The BM-SC is typically connected to a GGSN 6 as shown in figure 1.

The services using the MBMS mode of delivery can be rendered by servers 8-9 connected directly or via an external network 11 to the BM-SC 7. If a UE 1 has a subscription with a particular service of the MBMS type (e.g. broadcast of thematic information, like sport results, stock information, event notification, etc.), the corresponding server 8-9 is arranged to send data to the BM-SC 7, so that it is broadcast or multicast to the attention of the subscriber stations. The UE 1 is also able to receive the broadcast or multicast data, since it has a subscription with such service.

For this purpose, each time a transmission is about to be started for the service, which means data is going to be broadcast/multicast, the UMTS network 2 pages a group of UEs to cause them to switch to the relevant broadcast channel. As mentioned previously, paging is a classical functionality of radio telecommunication

networks. It consists of sending a message to a group of UEs depending on their location.

In the UMTS system, a feature called Discontinuous Reception (DRX) allows the creation of groups of UEs which only monitor one paging channel. 5 Paging messages are transmitted for a paging group only at some paging occasions within a temporal DRX cycle. Accordingly, the UEs of that group only listen to the paging channel on these occasions. This mechanism is described in the technical specification TS 25.304, version 5.2.0, Release 5, "UE Procedures in Idle Mode and Procedures for Cell Reselection in Connected Mode ", published by the 10 3GPP in December 2002.

Moreover, it can be noted that a paging indication mechanism has also been defined in the UMTS system to improve the DRX efficiency. It offers the possibility of having a number of subgroups within each group, determined by a specific coding transmitted over a paging indicator channel (PICH). A UE can thus 15 only listen to the PICH corresponding to its subgroup, and then decode the corresponding messages if any.

According to the invention, the paging message used for reaching a group or a subgroup of UEs for which an MBMS transmission is intended is defined in relation with a subscribed service, so that (almost) only the UEs that have a 20 subscription for the relevant service are paged to be warned of a MBMS transmission for the service. For this purpose, the identifier used for the paging group of the subscriber UEs incorporates data depending on the related service.

Each service is in principle identified in a unique way. Such identifier is stored in the UMTS network 2, which means it can be physically stored in a memory 25 within the network or simply retrieved by the network (e.g. from the provider server) when necessary. It is also stored within the subscriber UEs, i.e. in the UE memory or in a subscriber module associated with the UE, on the condition the UE has a subscription with said service. Such storage in the UE can result from a previous provisioning step. Since the number of different services which can be offered 30 through a multimedia network such as UMTS is potentially high, the unique identifier for each service is typically coded on a large binary sequence.

For instance, the unique service identifiers can advantageously comprise a combination of an IP address associated with the service (e.g. IP multicast address over which the service is multicast, IP address of the corresponding service provider server), or a corresponding uniform resource locator (URL), and an indication of the scope within which the above address is unique, for instance the APN ("Access Point Name") of the access point to which the server is connected, as commonly defined in particular in GPRS systems.

Such unique service identifiers can contain more than 200 octets. This long size is incompatible with the dimensioning of the paging channels, especially with the format of usual paging group identifiers (typically less than 20 bits).

According to the invention, the paging group identifier defined by the UMTS network in order to inform the subscribed UEs of the start of a transmission for an associated service includes a hash code obtained from the unique service identifier by using a hash function. Such hash code has a size significantly reduced compared to that of the original identifier. It thus can be well adapted to the paging capabilities.

The hash function is thus performed on a data string including at least part of a unique service identifier. In an advantageous embodiment of the invention, the data string to be hashed also includes an indication of the type of the corresponding service. Indeed, the service can have different types. For instance, services provided by the servers 8-9 are of the MBMS type. But for other services, like the ones offered by another server 10 (not connected to the BM-SC 7 in figure 1, but directly to the GGSN 6), another type can be used. A service platform can also be used between the GGSN 6 and the BM-SC 7.

Many hash functions are well known and can be used in the context of the invention. For instance, they can be based on common cryptographic hash algorithms, like MD2 (as described in RFC 1319, "The MD2 message-digest algorithm", published in April 1992 by the Internet Engineering Task Force (IETF)), SHA-1 (as described in the FIPS publication 180-1: "Secure hash standard", published in April 1994 by the National Institute of Standards and Technology), or MD5 (as described in RFC 1321, "The MD5 message-digest algorithm", Rivest, published in April 1992 by the IETF). All these hash algorithms guarantee a low

probability of collisions. In other words, the probability of obtaining an identical hash code from two different data strings is low.

In fact, the hash function used in the present context does not need to have the cryptographic properties of the above-mentioned algorithms. Alternatively, the
5 hash function is based on cyclic codes conventionally used in error detection or correction schemes. For instance, a conventional cyclic redundancy checksum (CRC) is suitable as the hash code derived from the long service identifier, especially if a mechanism for checking a posteriori the value of the entire unique service identifier exists as will be described hereinafter.

10 An advantage of the CRC, or of other types of simple hash function, is that they are much less computationally intensive than the cryptographic hash functions. This is an important advantage for low-resource devices such as UMTS terminals.

The hash algorithm used for coding the unique service identifiers may consist of extracting the first n bits of the result of one of the above-mentioned hash
15 algorithms applied to the data string including unique service identifier, where n is defined according to the typical size of paging group identifiers and to paging channel capabilities (e.g. n = 16).

The following C code illustrates an example of a simple hash function which can be used in the present invention to obtain a paging identifier ("hash") in the
20 form of an integer variable from a service identifier ("*str") expressed as a character string:

```
    unsigned int  
    hash(unsigned char *str)  
    {  
25        unsigned int hash = 5381;  
        int c;  
        while (c = *str++)  
            hash = ((hash << 5) + hash) + c; /* hash * 33 + c */  
        return hash;  
30    }
```

- 7 -

Such computation is performed both in the network 2 and in the subscriber UE to associate that UE with the paging identifier. In the context of UTRAN, the network 2 which performs such computation to associate the paging identifier with the service, is typically the radio network controller (RNC) which interfaces with the SGSN, controls a number of radio transceiver nodes and implements the RRC protocol and in particular the paging function.

Figure 2 illustrates a possible structure of the data string ("str") submitted to the hash function to compute the paging identifier. In this example, the data string has a first octet designating the service type, with a specific value specified for MBMS services and 255 other values, possibly reserved. The following octets #2, ..., n (where n is a variable integer) contain the unique service identifier, for example as a concatenation of APN and IP multicast address.

Upon reception of a paging message for its paging group, a UE switches to the broadcast or notification channel over which data from server 8 or 9 is transmitted according to the announcement made on the paging channel. The identity of the broadcast channel can be indicated to the UE by signaling or it can be known in advance by the UE.

The unique service identifier is included in the header information transmitted on the MBMS broadcast channel. Therefore, a paged UE can compare the unique service identifier received on that channel with the one stored in its memory. If the two service identifier do not match, it can conclude that it is not concerned by the service, disregard the information received on the MBMS channel and return to the idle mode. If they match, the UE will proceed with receiving the information pertaining to the service over the broadcast channel.

This checking mechanism reduces the effects of collisions resulting from the hashing operation, with a probability $1/65536$ if the paging identifiers are made of 16 bits.

As can be understood by the one skilled in the art, the invention can be used with radio telecommunication networks different from UMTS networks. It can also be used for different types of service.

CLAIMS:

1. A method of providing a service to wireless stations (1) through a telecommunication network (2), the service being identified by a unique service identifier stored in the telecommunication network and in at least one subscriber station among said wireless stations, the method comprising the steps-of:
- determining a paging identifier in the telecommunication network and at said subscriber station, by applying a hash function to a data string including at least part of the unique service identifier;
 - associating said subscriber station with the determined paging identifier; and
 - 10 - prior to transmitting information pertaining to the service over a broadcast channel, transmitting a paging message incorporating said paging identifier to the wireless stations.
2. A method as claimed in claim 1, wherein the information pertaining to the service, transmitted over the broadcast channel, includes the unique service identifier, and wherein a wireless station associated with said paging identifier responds to the paging message by switching to the broadcast channel, receiving the transmitted unique service identifier and checking whether the received service identifier matches the service identifier stored in said wireless station.
3. A method as claimed in claim 1 or 2, wherein said data string further includes an indication of a type of the service.
4. A method as claimed in any one of the foregoing claims, wherein the unique service identifier includes an address associated with the service and an indication of a scope within which said address is unique.
5. Telecommunication network equipment for participating in the provision of services to wireless stations (1), the equipment comprising:
- means for storing unique service identifiers respectively identifying the services;

- 9 -

- means for determining a respective paging identifier associated with each of the services, by applying a hash function to a data string including at least part of the unique identifier for said service; and
- 5 - means for transmitting a paging message incorporating the paging identifier associated with one of the services to the wireless stations, prior to transmitting information pertaining to said one of the services over a broadcast channel.

6. Equipment as claimed in claim 5, wherein the information pertaining to the service transmitted over the broadcast channel includes the unique service
10 identifier.



7. Equipment as claimed in claim 5 or 6, wherein the data string including at least part of the unique service identifier further includes an indication of a type of the service.

8. A wireless station for communicating through a telecommunication
15 network (2), the wireless station (1) comprising:

- means for storing at least one unique service identifier identifying a respective service to which the station has a subscription;
- means for determining a paging identifier, by applying a hash function to a data string including at least part of the unique service identifier; and
- 20 - means for receiving a paging message incorporating said paging identifier and, in response thereto, switching to reception over a broadcast channel to receive information pertaining to the service as transmitted from the telecommunication network.

9. A wireless station as claimed in claim 8, further comprising means for
25 detecting a service identifier in the information received over the broadcast channel and means for checking whether the detected service identifier matches the stored unique service identifier.

10. A wireless station as claimed in claim 8 or 9, wherein said data string further includes an indication of a type of the service.

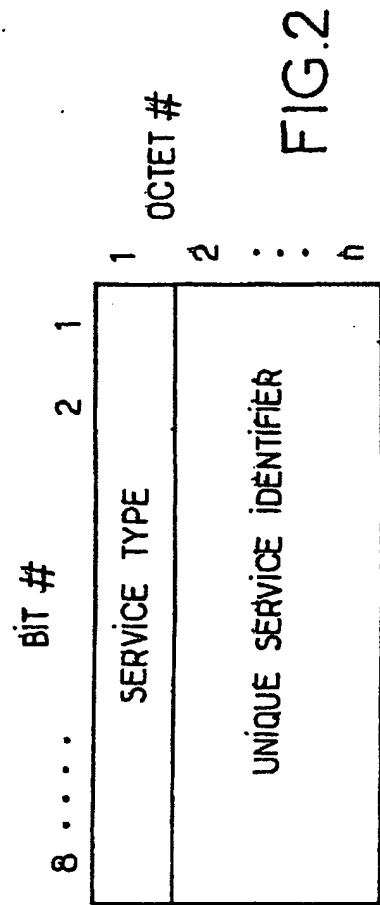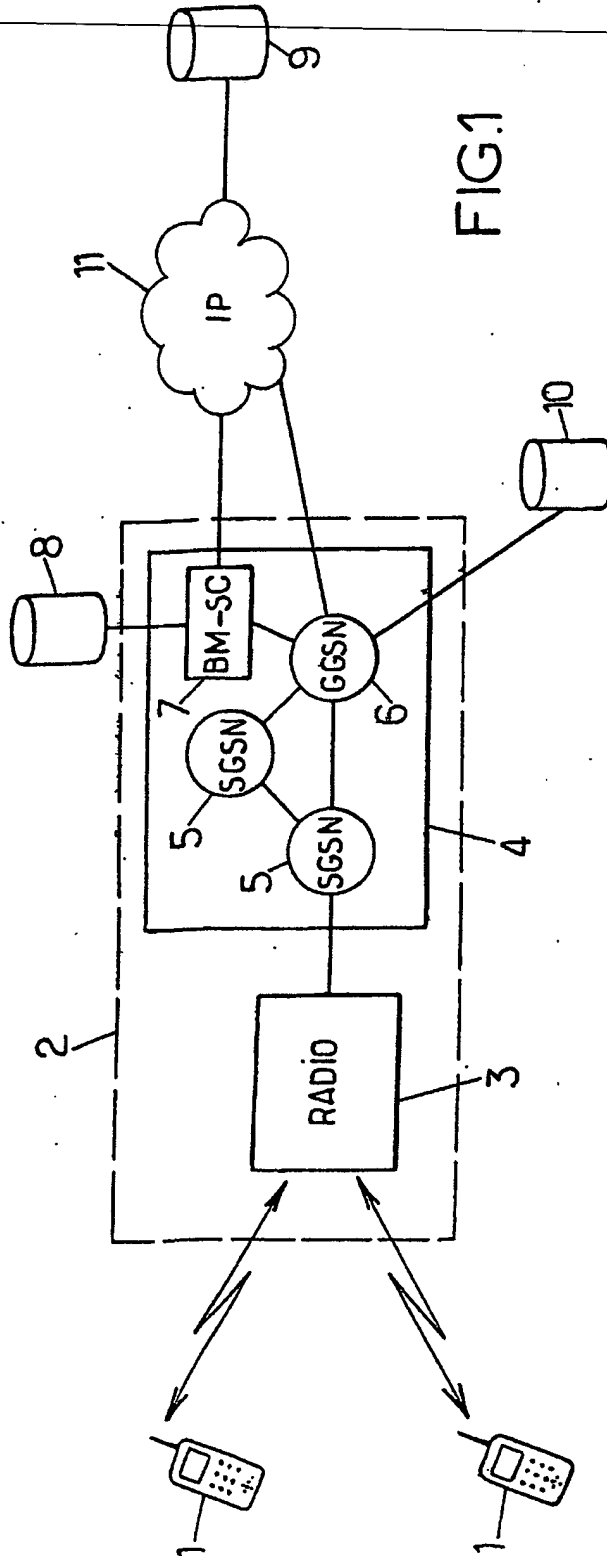

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP2004/004017

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04Q7/38

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 97/22217 A (GIBBS JONATHAN ALASTAIR ;ROBINSON WILLIAM NEIL (GB); WHINNETT NICH) 19 June 1997 (1997-06-19) page 3, line 19 - line 32 page 4, line 29 - line 38 page 8, line 17 - line 29	1,3-8,10
Y	WO 03/015440 A (BECKMANN MARK ;HANS MARTIN (DE); ECKERT MICHAEL (DE); OTTE ANDREAS) 20 February 2003 (2003-02-20) page 1, line 13 - page 2, line 8 page 6, line 34 - page 7, line 9 page 7, line 22 - page 8, line 5 page 18, line 24 - page 20, line 25 page 21, line 8 - page 22, line 13 page 23, line 19 - line 26 page 24, line 28 - page 26, line 3 figures 1,4	1,3-8,10
	-/-	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

A document member of the same patent family

Date of the actual completion of the international search

16 July 2004

Date of mailing of the international search report

27/07/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel (+31-70) 340-2040, Tx. 31 651 epo nl
Fax (+31-70) 340-3016

Authorized officer

Müller, N

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP2004/004017

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 918 177 A (MINICHELLO PAT ET AL) 29 June 1999 (1999-06-29) column 1, line 66 - column 2, line 19 column 4, line 25 - line 37 column 5, line 21 - line 33	1-10

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP2004/004017

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9722217	A	19-06-1997	GB 2308039 A	11-06-1997
			AU 705574 B2	27-05-1999
			AU 7288896 A	03-07-1997
			CA 2240021 A1	19-06-1997
			CN 1209254 A	24-02-1999
			WO 9722217 A1	19-06-1997
			EP 0873661 A1	28-10-1998
			RU 2156552 C2	20-09-2000
WO 03015440	A	20-02-2003	EP 1283648 A1	12-02-2003
			WO 03015440 A1	20-02-2003
			EP 1415497 A1	06-05-2004
US 5918177	A	29-06-1999	AU 5141298 A	22-06-1998
			BR 9713148 A	08-02-2000
			CA 2272959 A1	04-06-1998
			WO 9824249 A2	04-06-1998